


## Dimensions and performances Stûv 21/125 double face

Part-raise  
Low outlet:

Full raise  
& High outlet:

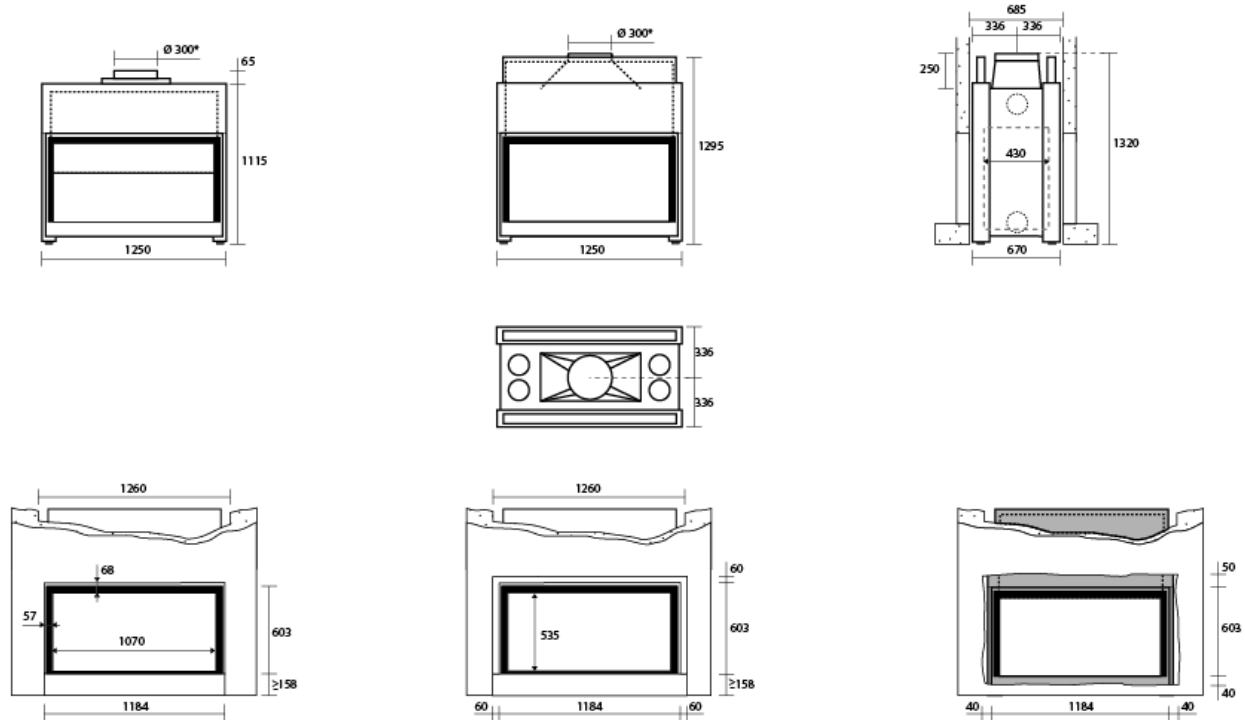

Gap for frame and counter-frame fitting.

Weight of the system	<b>310 kg</b>
Optimal usage range, evaluated by Stûv	<b>14 - 27 kW</b>
Consumption range in wood/hour at 12% humidity, evaluated by Stûv	<b>4,3 - 8,3 kg/h</b>
Efficiency at rated power with glass door lowered	<b>72 %</b>
CO emission	<b>0,21 %</b>
Particles emission (mg/Nm <sup>3</sup> ), measurement method based on din +	<b>31 mg/Nm<sup>3</sup></b>
Length of logs, horizontal position	<b>100 cm</b>
Conforms to the standard EN 13229	<b>CE</b>
Patent	<b>n° 1445541</b>

Stûv reserve the right to implement product modifications without notice.  
Measurements are within 3mm tolerance.